

MA-B

Body Worn Camera Battery Charger



MA-B1



MA-B2



MA-B3

Specifications

	MA-B1	MA-B2	MA-B3
Standard			
Interface	Micro USB2.0	AC input socket	AC input socket
Charger Slot (s)	1	6	6
Charging time	Fully charged within 3 hours		
Environmental			
Operating Temperature	-10°C ~ 55°C / 14°F ~ 131°F		
Operating Humidity	10% ~ 95%		
Electrical			
Ingress Protection Rating	IP66		IP00 ~ 240V AC, 50 ~ 60Hz
Power Consumption	Max. 6W	Max. 50W	Max. 180W
Electric Current	Max.1.2A (each slot)		
Mechanical			
Weight	97g / 0.21lb	1.3kg / 2.87lb	4kg / 8.82lb
Dimensions	75 × 47 × 24.5mm / 2.96" × 1.86" × 0.97"	230 × 160 × 37mm / 9.06" × 6.30" × 1.46"	630 × 230 × 45mm / 24.81" × 6.30" × 1.78"

Features

High-efficiency


- Constant current fast charge
- Trickle charge

High Reliability


- Overcurrent protection
- Short circuit protection

Dimensions


Units:mm

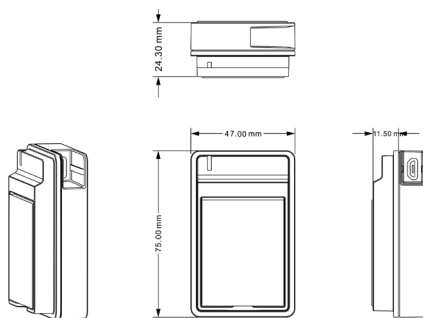

MA-B1

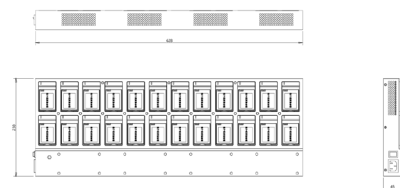

MA-B3

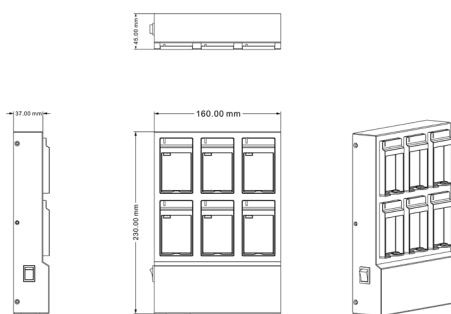

MA-B2